

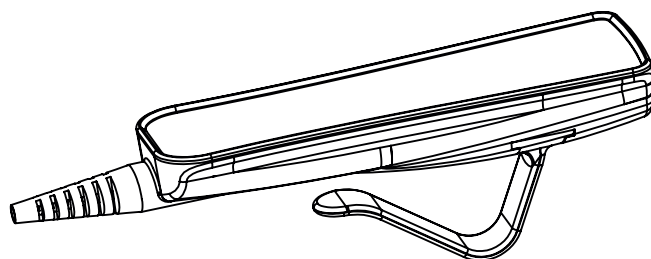



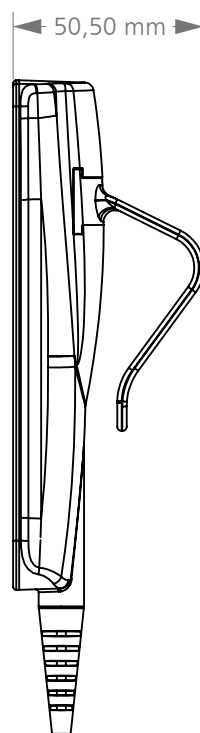

GENERAL FEATURES

Number of Keys	up to 12 buttons
Actuator Control Capacity	max. 4
IP Code	IPX6
Housing colour	RAL7035
Operating Temperature	-10°C to +50°C
Storage Temperature	-10°C to +50°C
Software	MsBus
Function LED	Yes
Power Supply	With cable in Control Boxes
Lockable	Magnetic lock

DIMENSION DRAWING

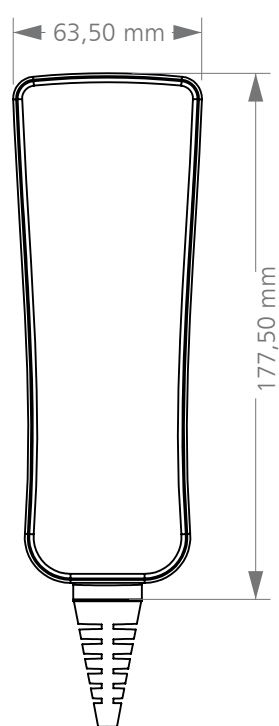


ORDERING KEY

		HCL
System Architecture	M: MsBus	M
Software Code	01: Standard Software Code XX: Special Software Code The code documentation will be shared with our customers.	01
IP Degree	6: IPX6	6
Button Number	09: 9 Buttons 12: 12 Buttons XX: Up to 12 buttons could be selected.	12
Membrane Item Number	XX: Last 2 digits of frontcover item number The membrane documentation will be shared with our customers.	01
Mounting	3: Hook Handset	3
Housing Colour	1: RAL7035	1
Cable	+ : Internal Cable	+
Cable Type	1: Spiral Cable	1
Connector	5: Modular Jack 10P6C 180° plug 6: Modular Jack 10P6C 90° plug	5
Cable Length	8: 3600mm 9: 5000mm	8


Ordering example: **HCLM016120131+158**

SYSTEM COMPATIBILITY

- If the cable connector is 180 degrees, then this system is applicable.

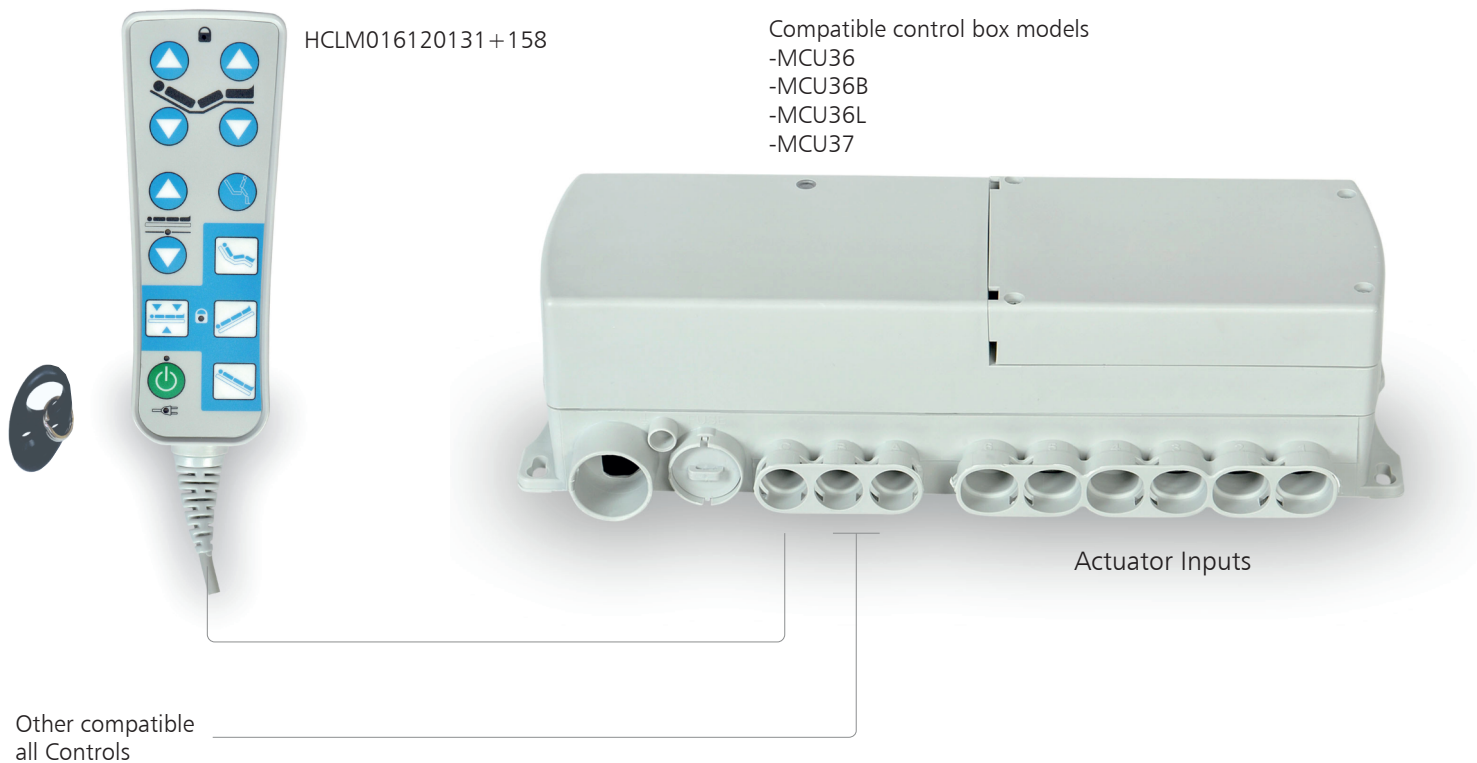

- If the cable connector is 90 degrees, then this system is applicable.

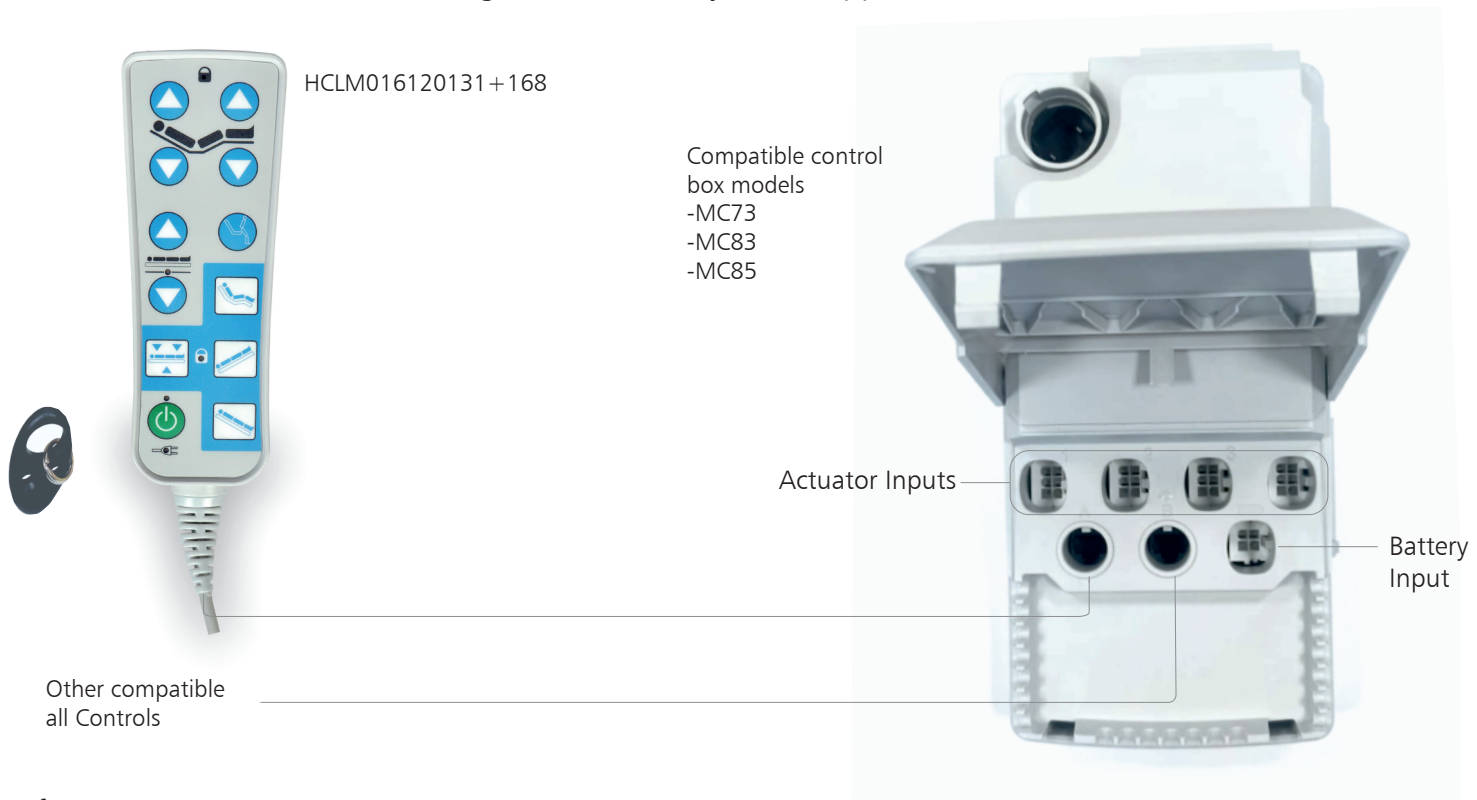

Terms of Use

The user is responsible for determining the suitability of MUKATECH products for a specific application. MUKATECH products are subject to change without prior notice.

Document Revision Information

MUKATECH 20230920 DT.REV01