

BU20


HEALTCARE SERIES/ACCESSORIES



GENERAL FEATURES

Battery type	Lead-Acid
Capacity	1.3Ah
Output voltage	24V DC
Maximum discharge current	6A
Charging current	250mA, controlled by BU20 internal charger
IP Code	IPX6
Housing colour	RAL7035
Operating Temperature	-10°C to +50°C
Storage Temperature	-10°C to +50°C
Function LED	Yes

DIMENSION DRAWING

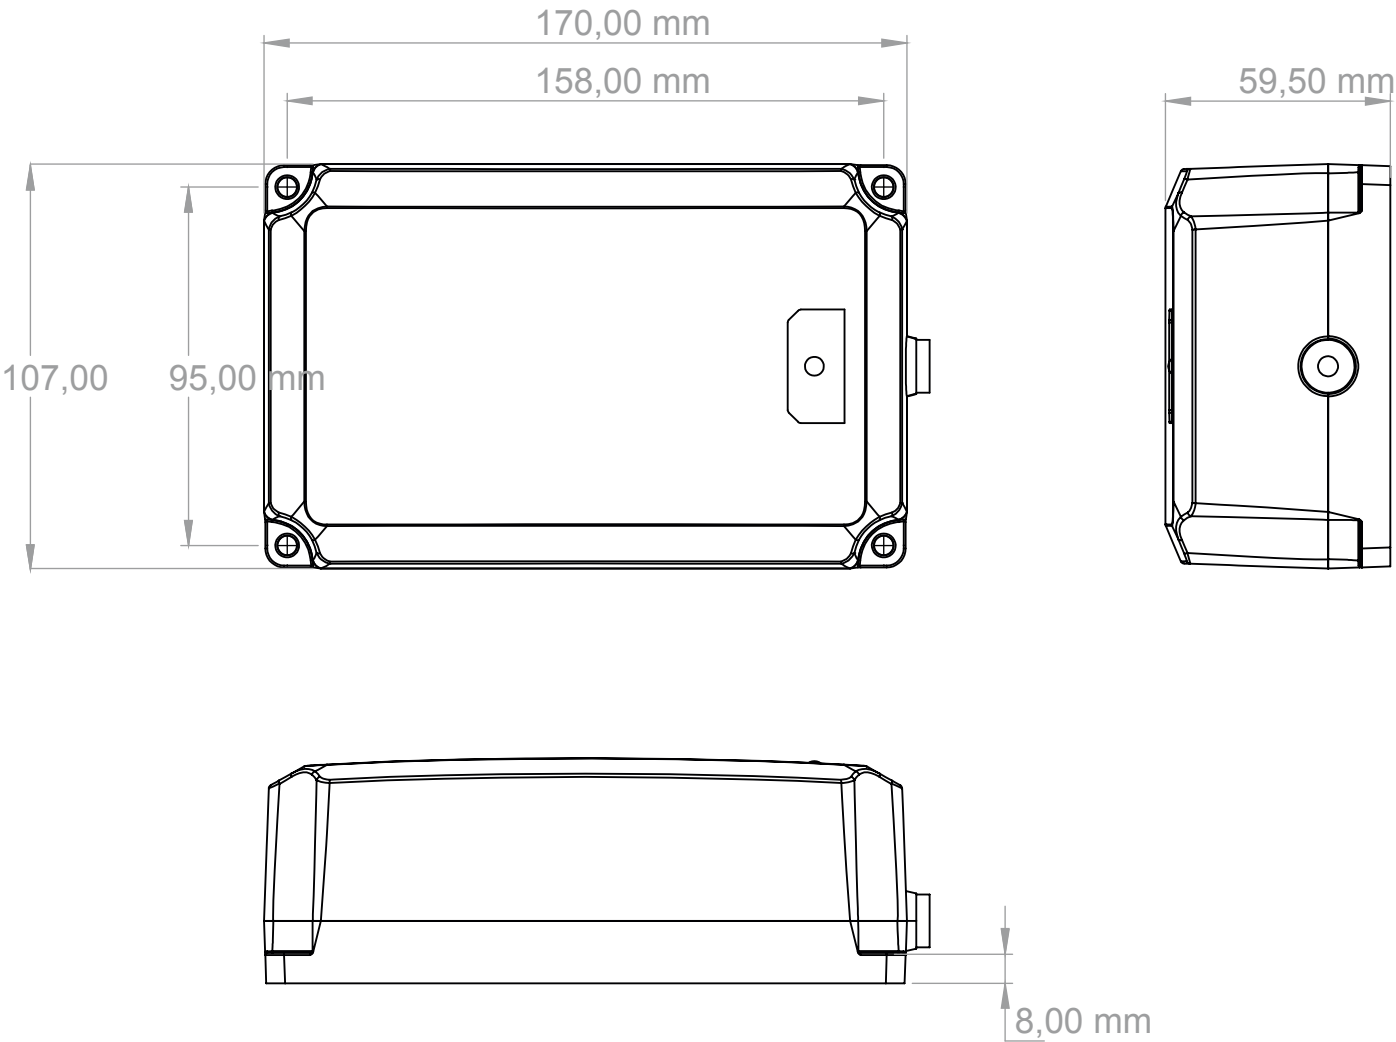

ORDERING KEY

		BU20
System Architecture	A: Analogue	A
Software Code	00: None	00
IP Degree	6: IPX6	6
Not Used	00: None	00
Not Used	00: None	00
Not used	0: None	0
Housing Colour	1: RAL7035	1
Cable	+ : Internal Cable	+
Cable Type	2: Flat Cable	2
Connector	8: Minifit 4P4C 90° plug	8
Cable Length	3: 1000mm	3

Ordering example: BU20A006000001+283

SYSTEM COMPATIBILITY


Compatible control
box models

- MC70
- MC73
- MC80
- MC83
- MC85

Actuator Inputs

Controls Inputs

BU20A006000001 + 283

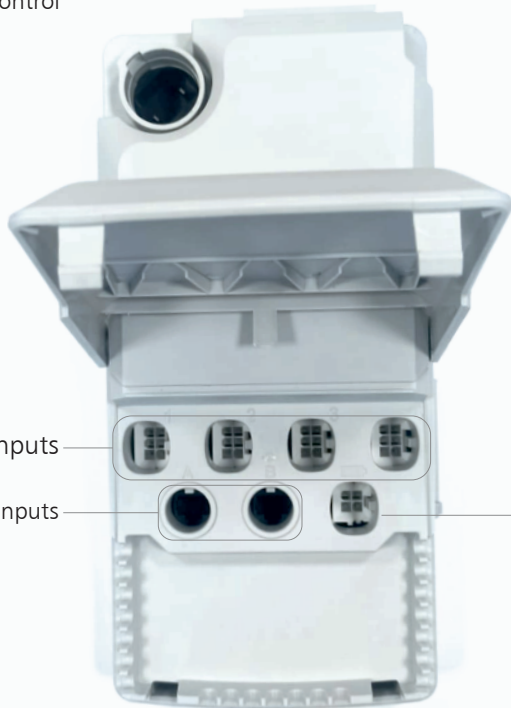

Terms of Use

The user is responsible for determining the suitability of MUKATECH products for a specific application. MUKATECH products are subject to change without prior notice.

Document Revision Information

MUKATECH 20230920 DT.REV01