

# TSP

HEALTHCARE SERIES/CONTROLS



## GENERAL FEATURES

Number of Keys	7-inch capacitive touch screen
Actuator Control Capacity	max. 5
IP Code	IPX6
Housing colour	RAL7035
Operating Temperature	+5°C to +40°C
Storage Temperature	-10°C to +50°C
Software	MsBus
Function LED	No
Power Supply	With cable in Control Boxes

## DIMENSION DRAWING



- It can be designed in all dimensions.

## ORDERING KEY


		TSP
System Architecture	M: MsBus	M
Software Code	01: Standard Software Code XX: Special Software Code The code documentation will be shared with our customers.	01
IP Degree	6: IPX6	6
Not used	00: None	00
Membrane Item Number	XX: Last 2 digits of frontcover item number The membrane documentation will be shared with our customers.	01
Not used	0: None	0
Housing Colour	1: RAL7035	1
Cable	+: Internal Cable	+
Cable Type	2: Flat Cable	2
Connector	5: Modular Jack 10P6C 180° plug 6: Modular Jack 10P6C 90° plug	5
Cable Length	7: 2300mm	7

Ordering example: TSPM016000101+257

## SYSTEM COMPATIBILITY

- In this system, a 180-degree cable should be used.

TSPM016000101+257

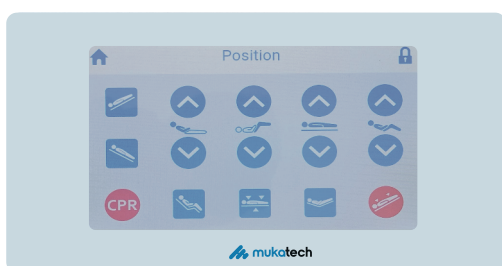

Compatible control box models

- MCU36
- MCU36B
- MCU36L
- MCU37




Actuator Inputs

Other compatible  
all Controls


- In this system, a 90-degree cable should be used.

TSPM016000101+267

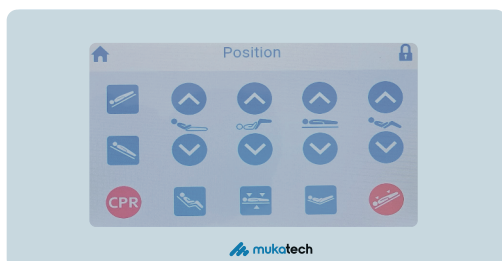

Compatible control  
box models

- MC73
- MC83
- MC85

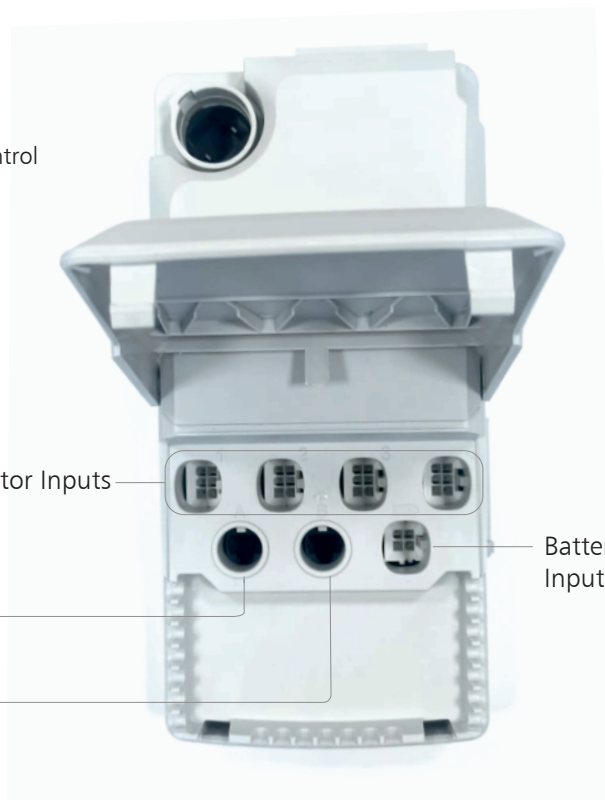

Actuator Inputs

Battery  
Input

Other compatible  
all Controls

### Terms of Use

The user is responsible for determining the suitability of MUKATECH products for a specific application. MUKATECH products are subject to change without prior notice.

### Document Revision Information

MUKATECH 20230920 DT.REV01

