

MC73





HEALTCARE SERIES/CONTROL BOXES



GENERAL FEATURES

| | |
|---------------------------|---|
| Controls Capacity | 2 |
| Actuator Control Capacity | 4 |
| IP Code | IPX6 |
| Housing colour | RAL7035 |
| Operating Temperature | +5°C to +40°C |
| Storage Temperature | -10°C to +50°C |
| Software | MsBus |
| Function LED | No |
| Power Supply | 120 / 230 VAC 50/60 Hz (internal 120W SMPS) |
| Safety system | Thermally protected. Short-circuit protected. |
| Protection class | Class 2, Class 1 is possible with AC cable |
| Internal Battery | No |
| Control Method | Relay |

DIMENSION DRAWING

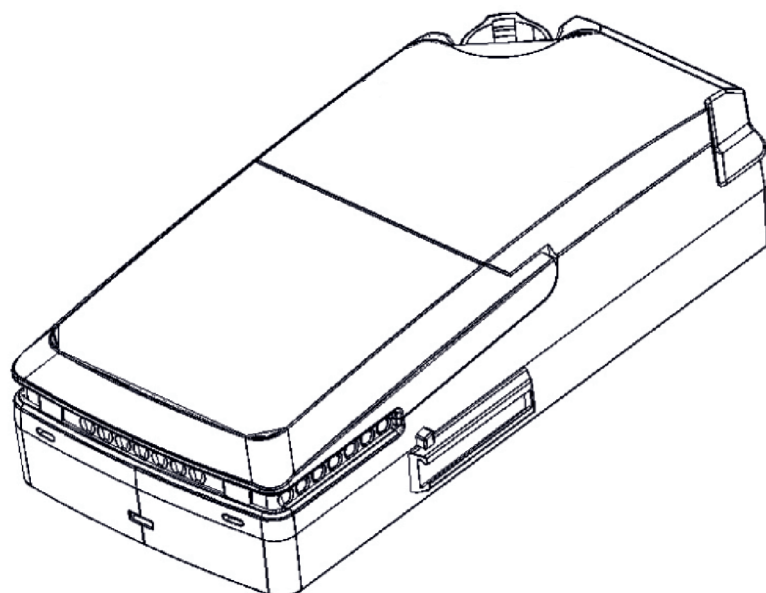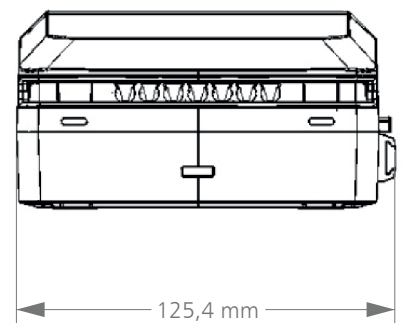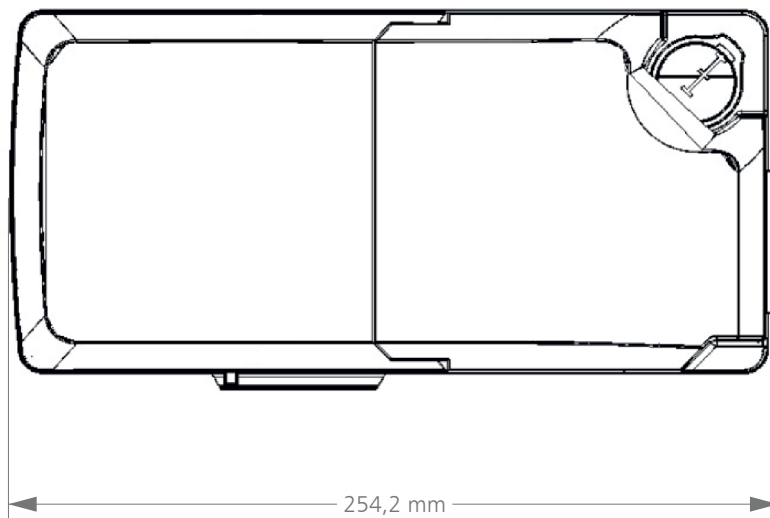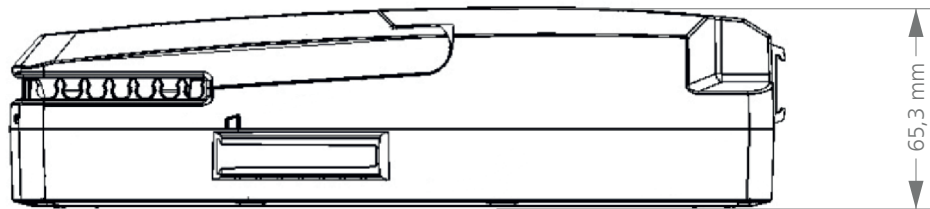


ORDERING KEY

| | | |
|-------------------------|---|------|
| | | MC73 |
| System Architecture | M: MsBus | M |
| Software Code | 01: Standard Software Code XX: Special Software Code <small>The code documentation will be shared with our customers.</small> | 01 |
| IP Degree | 6: IPX6 | 6 |
| Number of Controls | 2: 2 Controls | 2 |
| Number of Actuators | 4: 4 Actuators | 4 |
| Power | 12: 120W | 12 |
| Housing Colour | 1: RAL7035 | 1 |
| Battery | 0: External Battery | 0 |
| Control Method | R: Relay | R |
| H-Bridge | 0: Half Bridge | 0 |
| Power Supply | 2: SMPS | 2 |
| Electrical Class | 2: Class 2 | 2 |
| Grounding | 2: On AC Cable | 2 |
| Reserved for Future Use | 00: None | 00 |

Ordering example: MC73M016241210R022200

SYSTEM COMPATIBILITY

Ordering Key:MC73M016241210R022200

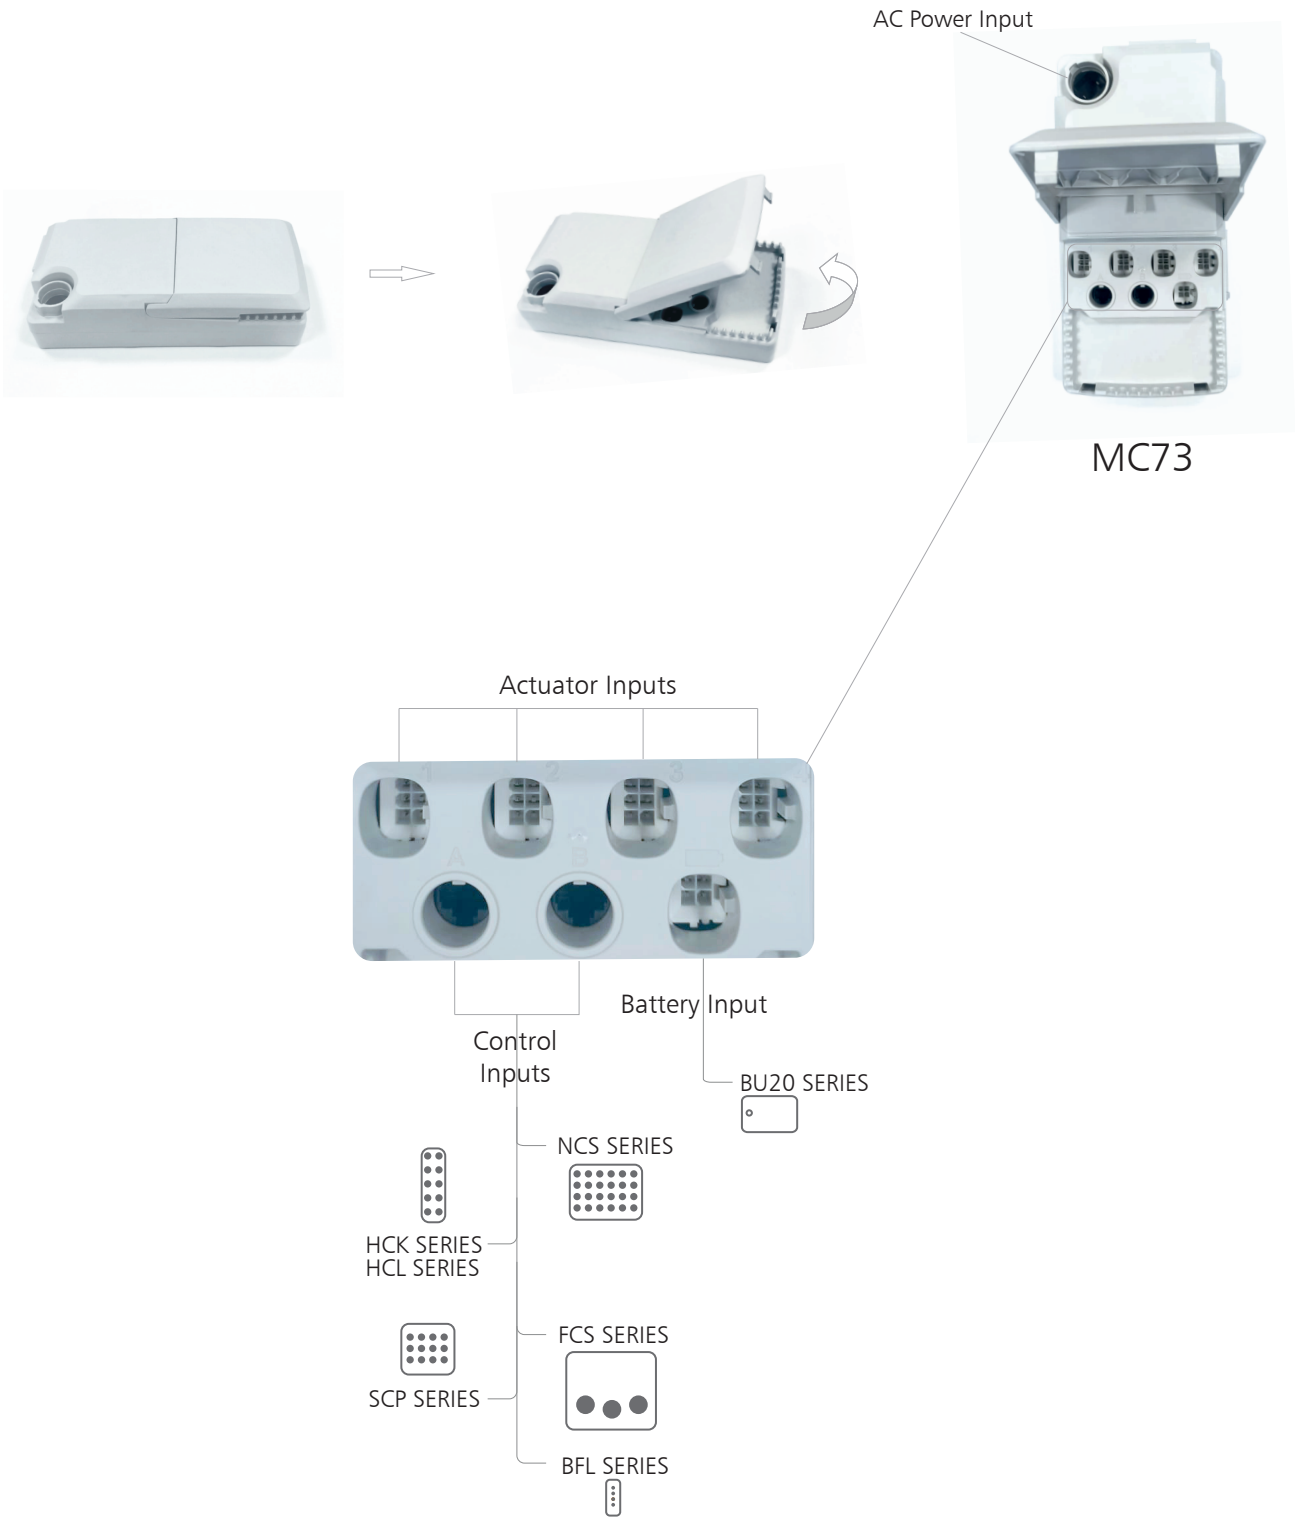

All controls are only usable with 90 degree cable. Please review the controls datasheets for detailed information.

Terms of Use

The user is responsible for determining the suitability of MUKATECH products for a specific application. MUKATECH products are subject to change without prior notice.

Document Revision Information
MUKATECH 20230920 DT.REV01

