

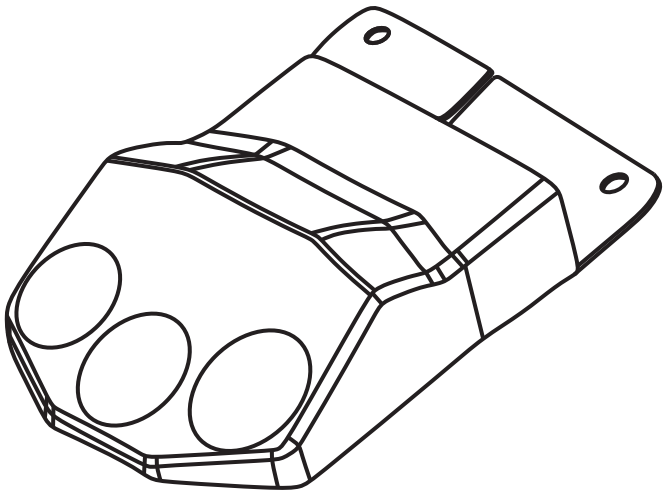
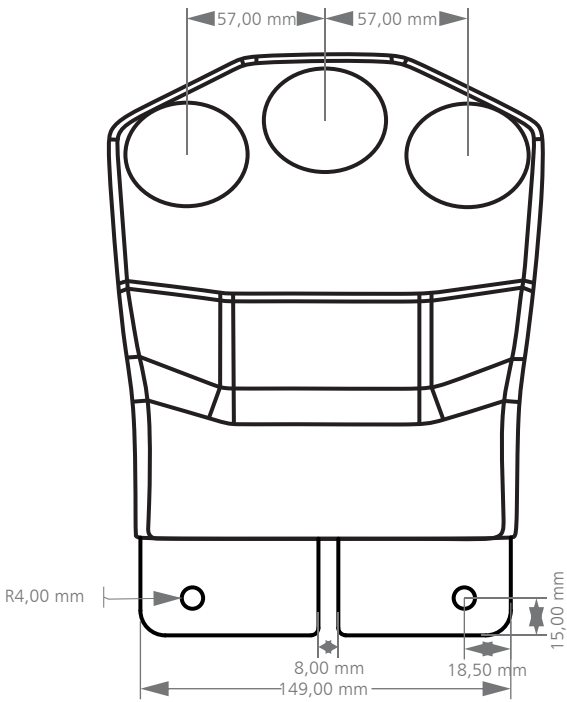


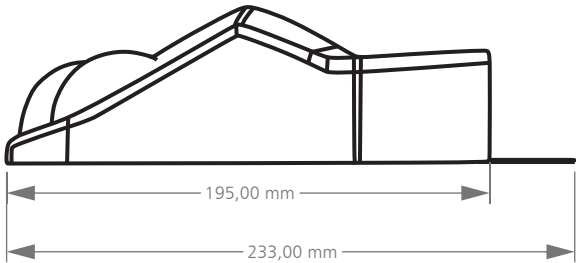

GENERAL FEATURES

Number of Keys	up to 3 buttons
Actuator Control Capacity	max. 4
IP Code	IPX6
Housing colour	RAL7035
Operating Temperature	+5°C to +40°C
Storage Temperature	-10°C to +50°C
Software	MsBus
Function LED	No
Power Supply	With cable in Control Boxes

DIMENSION DRAWING

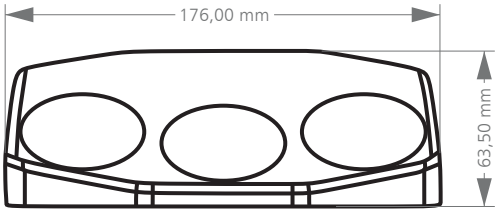

ORDERING KEY

		FCS
System Architecture	M: MsBus	M
Software Code	01: Standard Software Code XX: Special Software Code The code documentation will be shared with our customers.	01
IP Degree	6: IPX6	6
Button Number	01: 1 Button 02: 2 Buttons 03: 3 Buttons	03
Membrane Item Number	XX: Last 2 digits of frontcover item number The membrane documentation will be shared with our customers.	01
Not used	0: None	0
Housing Colour	1: RAL7035	1
Cable	+: Internal Cable	+
Cable Type	2: Flat Cable	2
Connector	5: Modular Jack 10P6C 180° plug 6: Modular Jack 10P6C 90° plug	5
Cable Length	7: 2300mm	7

Ordering example: FCSM016030101+257

SYSTEM COMPATIBILITY

- If the cable connector is 180 degrees, then this system is applicable.

FCSM016030101+257



Compatible control box models

- MCU36
- MCU36B
- MCU36L
- MCU37



Actuator Inputs

Other compatible
all Controls

- If the cable connector is 90 degrees, then this system is applicable.


FCSM016030101+267



Compatible control
box models

- MC73
- MC83
- MC85

Actuator Inputs

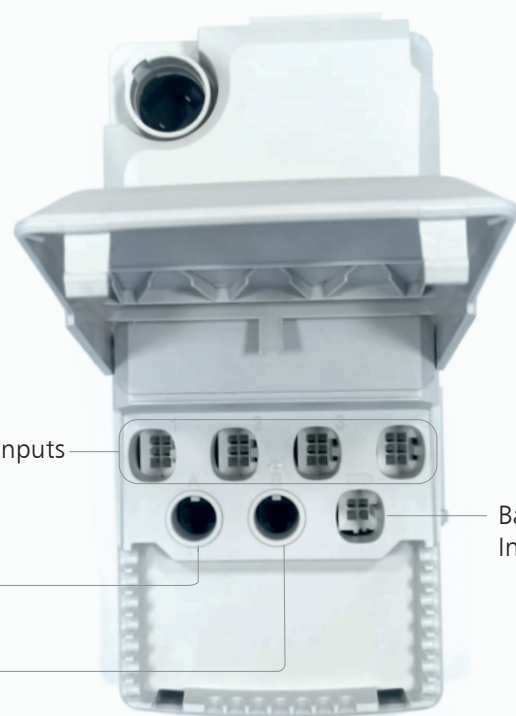

Battery
Input

Other compatible
all Controls

Terms of Use

The user is responsible for determining the suitability of MUKATECH products for a specific application. MUKATECH products are subject to change without prior notice.

Document Revision Information

MUKATECH 20230920 DT.REV01

