

BTA enables wireless control of Mukatech actuators.

With the Bedjust App adjust the bed with a mobile device.



GENERAL FEATURES

Enables wireless control

Ready to use

No mounting is needed

Minimal space requirements

Operating Temperature	+5°C to +40°C
-----------------------	---------------

Storage Temperature	-10°C to +50°C
---------------------	----------------

Software	MsBus
----------	-------

Power Supply	With cable in Control Boxes
--------------	-----------------------------

ORDERING KEY

		BTA
System Architecture	M: MsBus	M
Software Code	01: Standard Software Code XX: Special Software Code The code documentation will be shared with our customers.	01
IP Degree	6: IPX6	6
Not Used	00: None	00
Not Used	00: None	00
Not used	0: None	0
Housing Colour	1: RAL7035	1
Cable	+ : Internal Cable	+
Cable Type	2: Flat Cable	2
Not Used	0: None	0
Cable Length	0: None	0

Ordering example: **BTAM016000001+200**

SYSTEM COMPATIBILITY



BTAM01600001+200



Compatible control box models
-MC74
-MC84
-MC86




Actuator Inputs



Battery Input

Other compatible all Controls

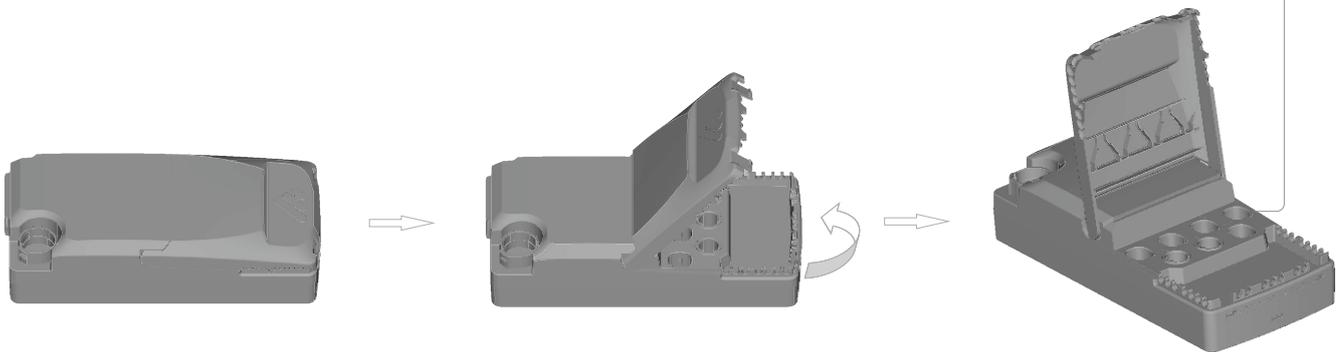

Terms of Use

The user is responsible for determining the suitability of MUKATECH products for a specific application. MUKATECH products are subject to change without prior notice.

Document Revision Information

MUKATECH 20241104 DT.REV00

